
PK(000)HX6BC125C1

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	AS REQ'D	X.XX" ODx 6' PEDESTAL, HDG	1
2	B5547(8X.87D-125BC)WT	WOOD TEMPLATE 16x16	1
3	.875TRODA449HDG	7/8"-9 x 24" THREADED ROD A449, HDG	8
4	H2-0875HN2HHDG	7/8"-9 HEX NUT GR.2H, HDG	32
5	H3-0875FWHDG	7/8" USS FLATWASHER, HDG	24
6	H4-0875LWHDG	7/8" SPLIT LOCKWASHER, HDG	8

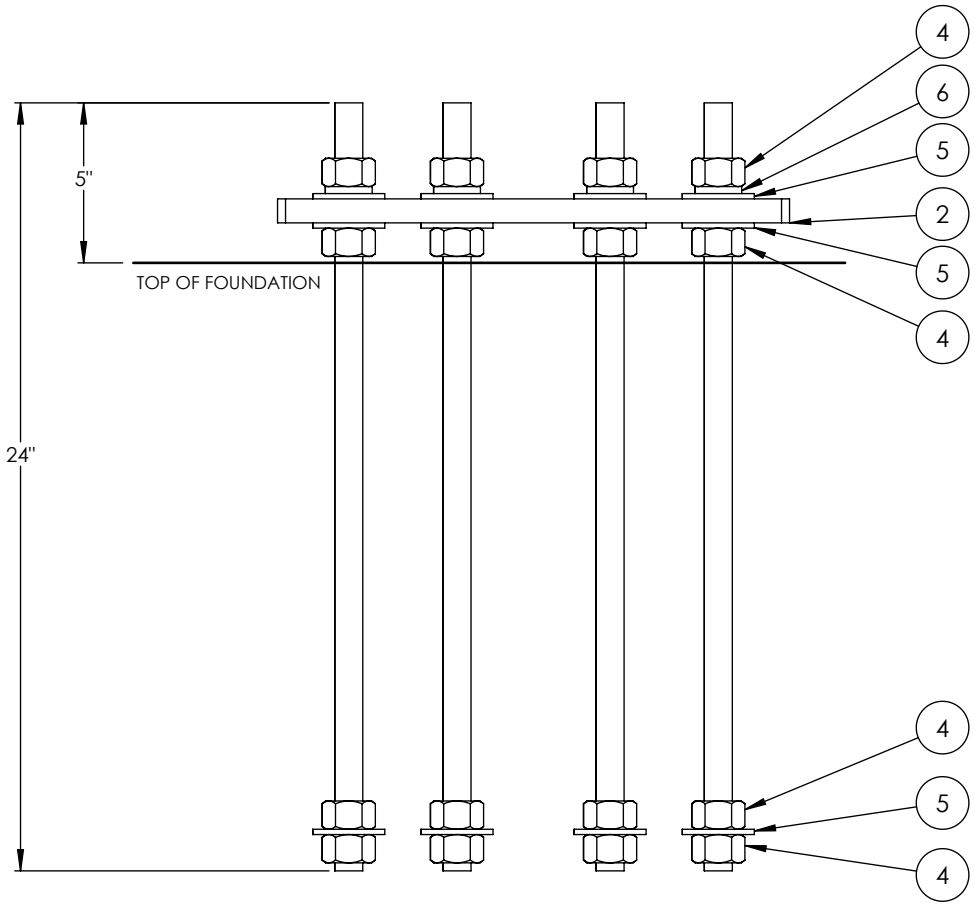

On one end of each rod attach a flatwasher sandwiched between two hex nuts. Attach the the other end of the rod to the wood template as shown in the diagram . The wood template will help the keep the rods aligned. When pouring the concrete keep the top 5" of thread clean.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BAIRD SUPPORTING SYSTEMS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BAIRD SUPPORTING SYSTEMS IS PROHIBITED.

BAIRD MOUNTING SYSTEMS

WWW.BAIRDMOUNTS.COM

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±


DO NOT SCALE DRAWING

BAIRD MOUNTING SYSTEMS
WATERLOO, IA 50703
PHONE: 319-233-3561
SALES@BAIRDMOUNTS.COM

TITLE:
6' PEDESTAL KIT 2.4m-3.7m
(SCHEDULE 80 PIPE)

DRAWN BY: JK	DATE: 09/26/14
MATERIAL: -	FINISH: -
DWG. PURPOSE: INST	SHEET: 1OF2
SCALE: -	
PART. NO.: PK(000)HX6BC125C1	
DWG. NO.: PK(000)HX6BC125C1 INST	

REV. 06/2024

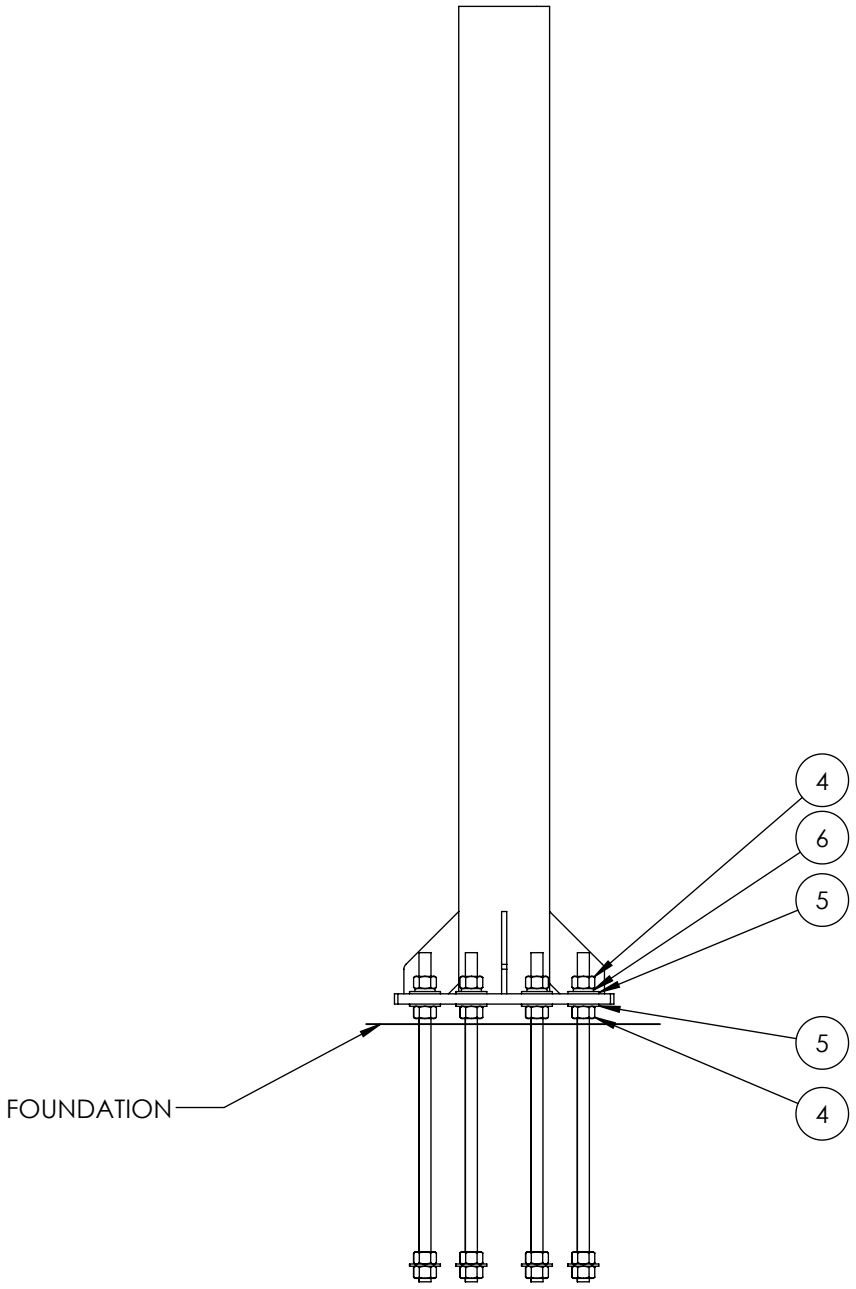

Remove the wood template after the concrete has cured. Clean the exposed threads and turn a nut all the way down to the top of the concrete on each rod. Set the pedestal and tighten hardware. See the drawing above.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BAIRD SUPPORTING SYSTEMS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BAIRD SUPPORTING SYSTEMS IS PROHIBITED.

BAIRD MOUNTING SYSTEMS

WWW.BAIRDMOUNTS.COM

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

DO NOT SCALE DRAWING

BAIRD MOUNTING SYSTEMS
WATERLOO, IA 50703
PHONE: 319-233-3561
SALES@BAIRDMOUNTS.COM

TITLE:
6' PEDESTAL KIT 2.4m-3.7m
(SCHEDULE 80 PIPE)

DRAWN BY: JK	DATE: 09/26/14
MATERIAL: -	FINISH: -
DWG. PURPOSE: INST	SHEET: 2OF2 / SCALE: -
PART. NO.: PK(000)HX6BC125C1	
DWG. NO.: PK(000)HX6BC125C1 INST	